

Ururu Sarara

The best of the best



Why choose Ururu Sarara?


- › Unique combination of humidification, dehumidification, fresh air ventilation, air purification and heating & cooling in 1 system
- › 3 area intelligent eye: air flow is sent to a zone other than where the person is located at that moment. Detection is done in 3 directions: left, front and right. If no people are detected, the unit will automatically switch over to the energy-efficient
- › Online controller (optional): control your indoor from any location with an app, via your local network or internet and keep an overview on your energy consumption
- › No need to clean filters, thanks to the self cleaning filter
- › Seasonal efficiency values: full range A+++ in cooling and heating
- › Whisper quiet in operation: the operating of the unit can hardly be heard. The sound pressure level goes down to 19dBA!
- › 3-D air flow combines vertical and horizontal auto swing to circulate a stream of warm or cool air right to the corners of even large spaces



The Daikin Ururu Sarara brings a new level of sophisticated control to air conditioning. It has five air treatment techniques which together provide a total comfort solution. In addition, the Ururu Sarara range has SEER and SCOP A+++ ratings thanks to its energy efficient compressor and heat exchanger. Because of its innovative technology, as well as its design, it won the prestigious Red Dot design award in 2013.



reddot design award
winner 2013

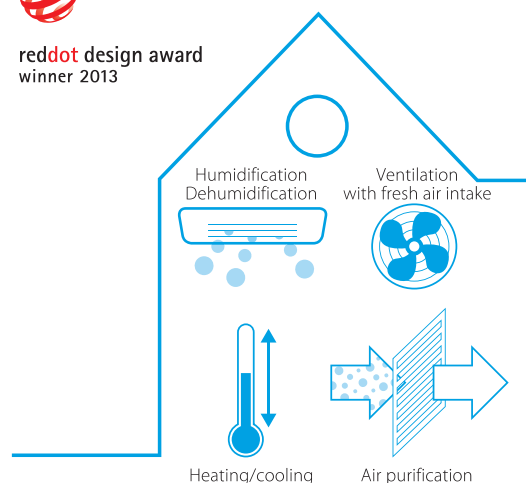

Flash Streamer: releases streams of high-speed electrons with strong oxidation power

Pre-filter: catches dust

Titanium apatite deodorising filter: captures allergens, bacteria & viruses and deodorizes smells of for example tobacco and pets

flash streamer
ONLY BY DAIKIN

5 air treatment techniques

- 1 Heating and cooling in one unit, for year-round comfort with the highest energy label available
- 2 In winter, the Ururu function replenishes the moisture in the air to maintain a comfortable feel without unnecessary heating
- 3 In summer, the Sarara function removes excess moisture while maintaining an even temperature thus eliminating the need for extra cooling
- 4 Ventilation for fresh air even with closed windows
- 5 Air purification and automatic filter cleaning to remove allergens, bacteria and viruses to supply clean air

Wall mounted unit

Complete climate control with (de)humidification, air purification & ventilation with top efficiencies in heating & cooling

- › Unique combination of humidification, dehumidification, fresh air, air purification and heating & cooling in 1 system
- › 3 area intelligent eye: air flow is sent to a zone other than where the person is located at that moment. Detection is done in 3 directions: left, front and right. If no people are detected, the unit will automatically switch over to the energy-efficient
- › Online controller (optional): control your indoor from any location with an app, via your local network or internet and keep an overview on your energy consumption
- › No need to clean filters, thanks to the self cleaning filter
- › Seasonal efficiency values: full range A+++ in cooling and heating
- › Whisper quiet in operation: the operating of the unit can hardly be heard. The sound pressure level goes down to 19dBA!
- › 3-D air flow combines vertical and horizontal auto swing to circulate a stream of warm or cool air right to the corners of even large spaces



Efficiency data		FTXZ + RXZ		25N + 25N	35N + 35N	50N + 50N
Cooling capacity	Min./Nom./Max.			0.6/2.5/3.9	0.6/3.5/5.3	0.6/5.0/5.8
Heating capacity	Min./Nom./Max.			0.6/3.6/7.5	0.6/5.0/9.0	0.6/6.3/9.4
Power input	Cooling	Min./Nom./Max.	kW	0.11/0.41/0.88	0.11/0.66/1.33	0.11/1.10/1.60
	Heating	Min./Nom./Max.	kW	0.10/0.62/2.01	0.10/1.00/2.53	0.10/1.41/2.64
Seasonal efficiency (according to EN14825)	Cooling	Energy label		A+++		
		Pdesign	kW	2.50	3.50	5.00
		SEER		9.54	9.00	8.60
	Annual energy consumption		kWh	92	136	203
	Heating (Average climate)	Energy label		A+++		
		Pdesign	kW	3.50	4.50	5.60
		SCOP/A		5.90	5.73	5.50
Annual energy consumption		kWh	831	1,100	1,427	
Nominal efficiency	EER			6.10 (1)	5.30 (1)	4.55 (1)
	COP			5.80 (1)	5.00 (1)	4.47 (1)
	Annual energy consumption		kWh	205	330	550
	Energy label		Cooling/Heating	A/A		

Indoor unit		FTXZ		25N	35N	50N
Dimensions	Unit	HeightxWidthxDepth	mm	295x798x372		
Weight	Unit			15		
Air filter	Type		Auto cleaning filter			
Fan - Air flow rate	Cooling	High/Low/Silent operation	m ³ /min	10.7/5.3/4.0	12.1/5.6/4.0	15.0/6.6/4.6
	Heating	High/Low/Silent operation	m ³ /min	11.7/6.7/4.8	13.3/6.9/4.8	14.4/7.7/5.9
Sound power level	Cooling			54	57	60
	Heating			56	57	59
Sound pressure level	Cooling	High/Low/Silent operation	dBA	38/26/19	42/27/19	47/30/23
	Heating	High/Low/Silent operation	dBA	39/28/19	42/29/19	44/31/24
Control systems	Infrared remote control		ARC477A1			
Power supply	Phase / Frequency / Voltage		Hz / V			
				1~ / 50 / 220-240		

Outdoor unit		RXZ		25N	35N	50N
Dimensions	Unit	HeightxWidthxDepth	mm	693x795x300		
Weight	Unit			50		
Sound power level	Cooling			59	61	63
	Heating			59	61	64
Sound pressure level	Cooling	High	dBA	46	48	49
	Heating	High	dBA	46	48	50
Operation range	Cooling	Ambient	Min.-Max.	°CDB		
	Heating	Ambient	Min.-Max.	°CWB		
Refrigerant	Type		R-32			
	Charge		kg	1.34		
	GWP		TCO ₂ eq	0.9		
Piping connections	Liquid	OD	mm	6.35		
	Gas	OD	mm	9.5		
	Piping length	OU - IU	Max.	m		
	Level difference	IU - OU	Max.	m		
Power supply	Phase / Frequency / Voltage		Hz / V			
				1~ / 50 / 220-240		
Current - 50Hz	Maximum fuse amps (MFA)		A			
				16		

(1) EER/COP according to Eurovent 2012, for use outside EU only.

(2) MFA is used to select the circuit breaker and the ground fault circuit interrupter (earth leakage circuit breaker). For more detailed information on each combination, please refer to the electrical drawing.