

# 4-way blow ceiling suspended unit

FUQ-C



Unique in the market!

Seasonal Classic Seasonal Smart



Home leave operation



Draught prevention



Individual flap control



Vertical auto swing

Unique Daikin unit for high rooms with no false ceilings nor free floor space

- > Even rooms with ceilings up to 3.5m can be heated up or cooled down very easily without capacity loss
- > Individual flap control: flexibility to suit every room layout without changing the location of the unit!

- > 5 different discharge angles between 0 and 60° can be programmed via the remote control
- > Stylish unit blends easily with any interior. The flaps close entirely when the unit is not operating and there are no air intake grilles visible

# FUQ-C + RZQG-L(8)Y1/ RZQG-L9V1/RZQSG-L3/9V1/ RZQSG-L(8)Y1

4-way blow  
ceiling suspended cassette



Unique Daikin unit for high rooms  
with no false ceilings nor free floor space

Best in class quality

Connects to



Flexible installation  
with individual flap control

Stylish unit

Stylish unit blends easily with any interior. The flaps close entirely when the unit is not operating and there are no air intake grilles visible

Indoor unit		FUQ	71C	100C	125C
Casing	Colour			Fresh White	
Dimensions	Unit	HeightxWidthxDepth	mm		
Sound power level	Cooling	dBA	59	64	65
	Heating	dBA	59	64	65
Sound pressure level	Cooling	High/Low	41/35	46/39	47/40
	Heating	High/Low	41/35	46/39	47/40
Control systems	Infrared remote control			BRC7C58	
	Wired remote control			BRC1D52 / BRCIE52A/B	
Refrigerant	Type			R-410A	
	GWP			-	

Seasonal Smart Combination with Seasonal Smart outdoor units ensure high quality, optimal comfort, flexible installation and highest efficiency values.

Efficiency data		FUQ + RZQG	71C + 71L9V1	100C + 100L9V1	125C + 125L9V1	71C + 71L8Y1	100C + 100L8Y1	125C + 125L8Y1
Cooling capacity	Nom.	kW	6.8	9.5	12.0	6.8	9.5	12.0
Heating capacity	Nom.	kW	7.5	10.8	13.5	7.5	10.8	13.5
Power input	Cooling	Nom.	1.68	2.46	3.54	1.68	2.46	3.54
	Heating	Nom.	1.84	2.73	3.95	1.84	2.73	3.95
Seasonal efficiency (according to EN14825)	Cooling	Energy label	A++					
		Pdesign	6.80	9.50	12.00	6.8	9.5	12
		SEER	6.50	6.11	5.61	6.5	6.11	5.61
		Annual energy consumption	367	545	749	367	545	749
	Heating (Average climate)	Energy label	A+					
		Pdesign	7.60	11.30	14.13	7.6	11.3	14.13
		SCOP/A	4.20	4.50	4.44	4.2	4.5	4.44
		Annual energy consumption	2,534	3,516	4,456	2,534	3,516	4,456
Nominal efficiency	EER		4.05	3.86	3.39	4.05	3.86	3.39
	COP		4.08	3.95	3.42	4.08	3.95	3.42
	Annual energy consumption	kWh	840	1,230	1,770	840	1,230	1,770
	Energy label	Cooling/Heating	A/A	A/A	A/B	A/A	A/A	A/B

Outdoor unit		RZQG	71L8Y1	100L8Y1	125L8Y1	71L9V1	100L9V1	125L9V1
Dimensions	Unit	HeightxWidthxDepth	990x940x320		1,430x940x320	990x940x320		1,430x940x320
Sound power level	Cooling	dBA	64	66	67	64	66	67
Sound pressure level	Cooling	Nom.	48	50	51	48	50	51
	Heating	Nom.	50	52	53	50	52	53
	Night quiet mode	Level 1	43	45		43	45	
Operation range	Cooling	Ambient	Min.~Max.	-15~50			-15~50	
	Heating	Ambient	Min.~Max.	-20~15.5			-20~15.5	
Refrigerant	Type/Charge/GWP	kg/TCO <sub>2</sub> eq	R-410A/2.9/6.1/2,087.5		R-410A/4.0/8.4/2,087.5	R-410A/2.9/6.1/2,087.5		R-410A/4.0/8.4/2,087.5
Power supply	Phase/Frequency/Voltage	Hz/V	3N~/50/380-415			1~/50/220-240		


Contains fluorinated greenhouse gases




**Seasonal Classic** Combination with Seasonal Classic ensures good value for money for all types of commercial applications.

Efficiency data				FUQ + RZQSG	71C + 71L3V1	100C + 100L9V1	125C + 125L9V1	100C + 100L8Y1	125C + 125L8Y1
Cooling capacity	Nom.		kW	6.80	9.5	12.0	9.5	12.0	
Heating capacity	Nom.		kW	7.50	10.8	13.5	10.8	13.5	
Power input	Cooling	Nom.	kW	2.12	2.96	4.53	2.96	4.53	
	Heating	Nom.	kW	2.08	2.99	3.95	2.99	3.95	
Seasonal efficiency (according to EN14825)	Cooling	Energy label		A+		A		A+	
		Pdesign		6.80	9.50	12.00	9.50	12.00	
		SEER		5.81	5.61	5.30	5.61	5.30	
	Heating (Average climate)	Annual energy consumption		410	593	793	593	793	
		Energy label		A		A		A+	
		Pdesign		6.33	7.60		7.60		7.60
Nominal efficiency	SCOP/A		3.90	4.01	3.85	4.01	3.85		
	Annual energy consumption		2,273	2,654	2,764	2,654	2,764		
	EER		3.21		2.65		3.21		
	COP		3.61		3.41		3.61		
Annual energy consumption			kWh	1,060	1,480	2,265	1,480	2,265	
Energy label			Cooling/Heating	A/A		D/B		A/A	

Outdoor unit				RZQSG	71L3V1	100L9V1	125L9V1	100L8Y1	125L8Y1
Dimensions	Unit	HeightxWidthxDepth		mm	770x900x320	990x940x320			
Sound power level	Cooling			dBA	65	70		69	70
Sound pressure level	Cooling	Nom./Silent operation		dBA	49/47	53/-	54/-	53	54
	Heating	Nom.		dBA	51	57	58	57	58
	Night quiet mode	Level 1		dBA	-	49			
Operation range	Cooling	Ambient	Min.-Max.	°CDB	-15.0~46	-15~46			
	Heating	Ambient	Min.-Max.	°CWB	-15~15.5				
Refrigerant	Type/Charge/GWP			kg/TCO <sub>eq</sub>	R-410A/2.75/5.7/2,087.5	R-410A/2.9/6.1/2,087.5			
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/220-240			3N~/50/380-415	

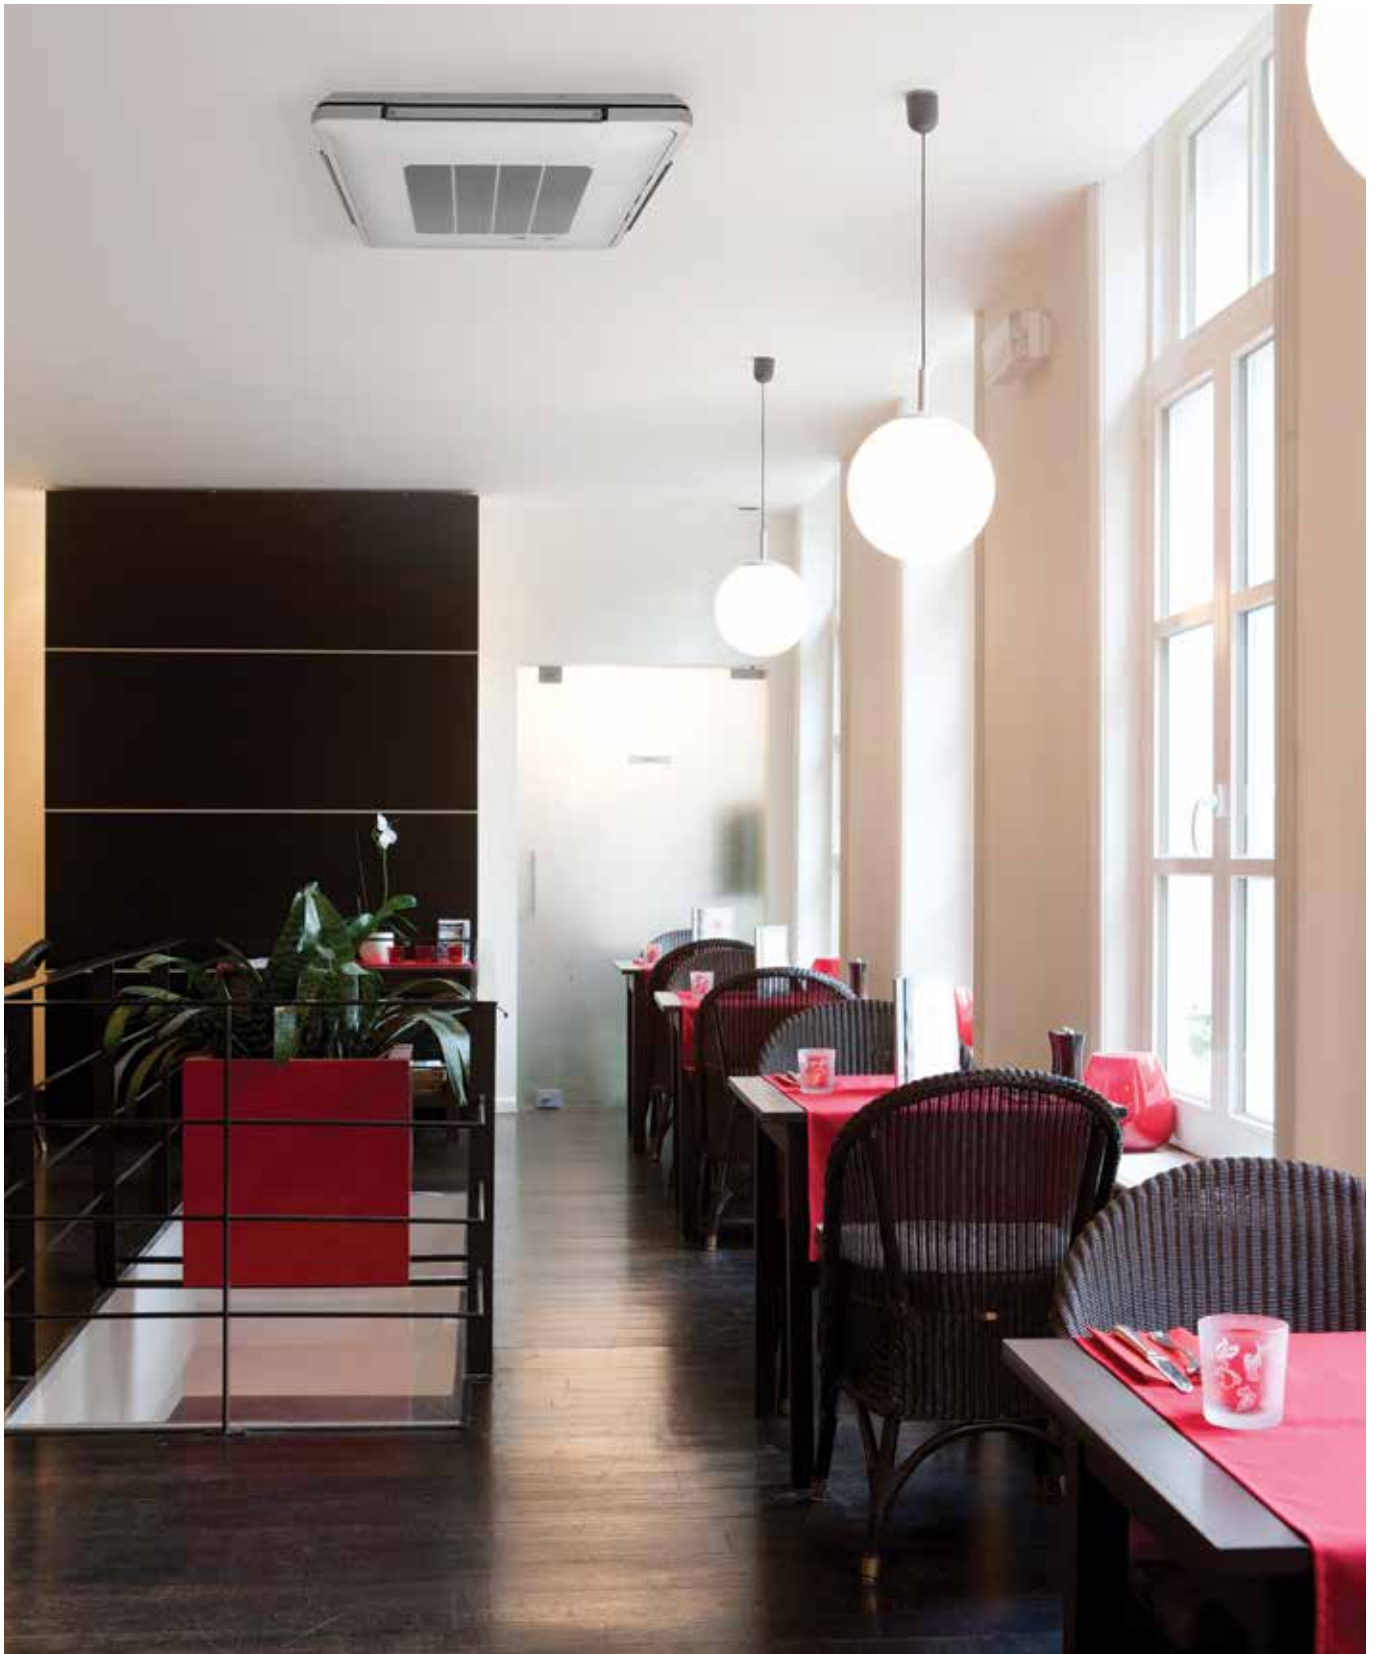

**Daikin Europe N.V.** Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · [www.daikin.eu](http://www.daikin.eu) · BE 0412 120 336 · RPR Oostende (Responsible Editor)



ECPEN16-112 05/16



Daikin Europe N.V. participates in the Eurovent Certification programme for Liquid Chilling Packages (LCP), Air handling units (AHU), Fan coil units (FCU) and variable refrigerant flow systems (VRF) Check ongoing validity of certificate online: [www.eurovent-certification.com](http://www.eurovent-certification.com) or using: [www.certiflash.com](http://www.certiflash.com)



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.